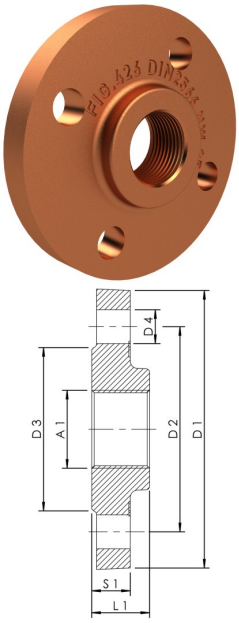


## Product Features

- wetted metal parts made from dezincification-free and corrosion-resistant gunmetal, resistant against aggressive water

## Standards and Approvals

- according to UBA BWGL Metals
- similar to DIN 2566
- ÜA-Reg.-Nr. R-15.2.3-21-17048, WIEN-ZERT

## Technical data

- pressure rating PN 16
- max. operating temperature 200 °C

| Part no. | DN | hole pattern (PN) | bolt holes | A1 | D1 (mm) | D2 (mm) | D3 (mm) | D4 (mm) | L1 (mm) | S1 (mm) | Weight (kg) |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 4260001500 | 15 | 10/16 | 4 | Rp 1/2 | 95 | 65 | 45 | 14 | 20 | 14 | 0.68 |
| 4260002000 | 20 | 10/16 | 4 | Rp 3/4 | 105 | 75 | 58 | 14 | 24 | 16 | 0.98 |
| 4260002500 | 25 | 10/16 | 4 | Rp 1 | 115 | 85 | 68 | 14 | 24 | 16 | 1.20 |
| 4260003200 | 32 | 10/16 | 4 | Rp 1 1/4 | 140 | 100 | 77 | 18 | 26 | 16 | 1.60 |
| 4260004000 | 40 | 10/16 | 4 | Rp 1 1/2 | 150 | 110 | 88 | 18 | 26 | 16 | 1.81 |
| 4260005000 | 50 | 10/16 | 4 | Rp 2 | 165 | 125 | 100 | 18 | 28 | 18 | 2.49 |
| 4260006500 | 65 | 10/16 | 4 | Rp 2 1/2 | 185 | 145 | 122 | 18 | 32.5 | 18 | 3.33 |
| 4260008000 | 80 | 10/16 | 8 | Rp 3 | 200 | 160 | 138 | 18 | 34 | 20 | 4.12 |
| 4260010000 | 100 | 10/16 | 8 | Rp 4 | 220 | 180 | 159 | 18 | 38 | 20 | 4.76 |

*© Copyright by Gebr. Kemper GmbH + Co. KG / Harkortstraße 5 / D-57462 Olpe*