




Product Features

- suitable for Stop Valves with flange connection e.g. figure 135
- incl. EPDM-bonnet gasket
- wetted metal parts made from dezincification-free and corrosion-resistant gunmetal, resistant against aggressive water
- maintenance-free spindle sealing with self-lubricating and under pressure replaceable EPDM-lip gasket
- EPDM-seat gasket

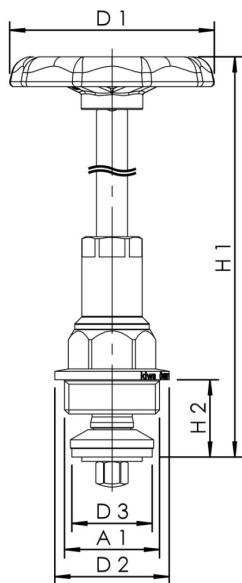

Standards and Approvals

- according to accepted materials list from German environmental agency
- for valves acc. DIN 3502

Part no.	for DN	A1	A1	D1 (mm)	D2 (mm)	D3 (mm)	H1 (mm)	H2 (mm)	kg
E010913502015KP	15	G 1/2	60	26.4	16.4	127	20	0.21	
E010913502020KP	20	G 3/4	60	32.4	22	150	26.5	0.23	
E010913502025KP	25	G 1	70	39.9	28	168	27.5	0.38	
E010913502032KP	32	G 1 1/4	70	49.9	36	197	28.5	0.54	
E010113502040KP	40	G 1 1/2	70	57.9	41.5	208	41.5	0.60	
E010113502050KP	50	G 2	90	69.9	53	232.5	42.5	0.92	
E010113502065KP	65	G 2 1/2	120	87.9	68	322.5	35.5	1.77	
E010113502080KP	80	G 3	120	101.9	81	360	37	2.13	
E010113500100KP	100	M110 x 2	120	120.9	100	292	68	3.27	
E010113500125KP	125	M142 x 2	213	155	125	450	56.6	10.11	
E010113500150KP	150	225	190	155	486	112.7	15.80		