




### Product Features

- suitable for e.g. figure 173, 183 and 190
- wetted metal parts made from dezincification-free and corrosion-resistant gunmetal, resistant against aggressive water
- maintenance-free spindle sealing with self-lubricating and under pressure replaceable EPDM-lip gasket
- EPDM-seat gasket
- DN 65 and DN 80 for valves from 1991

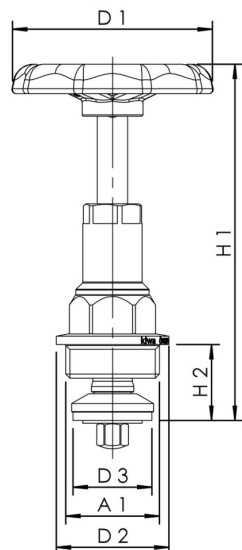

### Standards and Approvals

- according to UBA BWGL Metals
- for valves acc. DIN 3502

| Part no.        | DN | for DN | A1      | D1<br>(mm) | D2<br>(mm) | D3<br>(mm) | H1<br>(mm) | H2<br>(mm) | Weight<br>(kg) |
|-----------------|----|--------|---------|------------|------------|------------|------------|------------|----------------|
| E010917302015KP | 15 | 15     | G 1/2   | 60         | 26.4       | 16.4       | 100        | 20         | 0.18           |
| E010917302020KP | 20 | 20     | G 3/4   | 60         | 32.4       | 22         | 101.5      | 26.5       | 0.20           |
| E010917302025KP | 25 | 25     | G 1     | 70         | 39.9       | 28         | 128.5      | 27         | 0.35           |
| E010117302040KP | 40 | 40     | G 1 1/2 | 70         | 57.9       | 41.5       | 158        | 41         | 0.55           |
| E010917302032KP | 32 | 32     | G 1 1/4 | 70         | 49.9       | 36         | 149        | 29         | 0.51           |
| E010117302050KP | 50 | 50     | G 2     | 90         | 69.9       | 53         | 182.5      | 43         | 0.86           |
| E010117302065KP | 65 | 65     | G 2 1/2 | 120        | 87.9       | 68         | 255        | 35.5       | 1.63           |
| E010117302080KP | 80 | 80     | G 3     | 120        | 101.9      | 81         | 256        | 37         | 1.96           |